

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup>:

H01M 2/28, 10/14

A1

(11) International Publication Number:

WO 94/16466

(43) International Publication Date:

21 July 1994 (21.07.94)

(21) International Application Number: PCT/GB93/02671

(22) International Filing Date: 30 December 1993 (30.12.93)

(30) Priority Data:

9300356.4

9 January 1993 (09.01.93)

GB

(71) Applicant (for all designated States except US): TBS ENGINEERING LIMITED [GB/GB]; Longhill, Elmstone Hardwicke, Cheltenham, Gloucestershire GL51 9TY (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HOPWOOD, Robert, Timothy [GB/GB]; 34 Alma Road, Hatherley, Cheltenham, Gloucestershire GL51 5LZ (GB).

(74) Agents: DUNLOP, Brian, Kenneth, Charles et al.; Wynne-Jones, Laine &amp; James, 22 Rodney Road, Cheltenham, Gloucestershire GL50 1JJ (GB).


(81) Designated States: AU, CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

## Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: APPARATUS FOR ASSEMBLING BATTERY PLATES

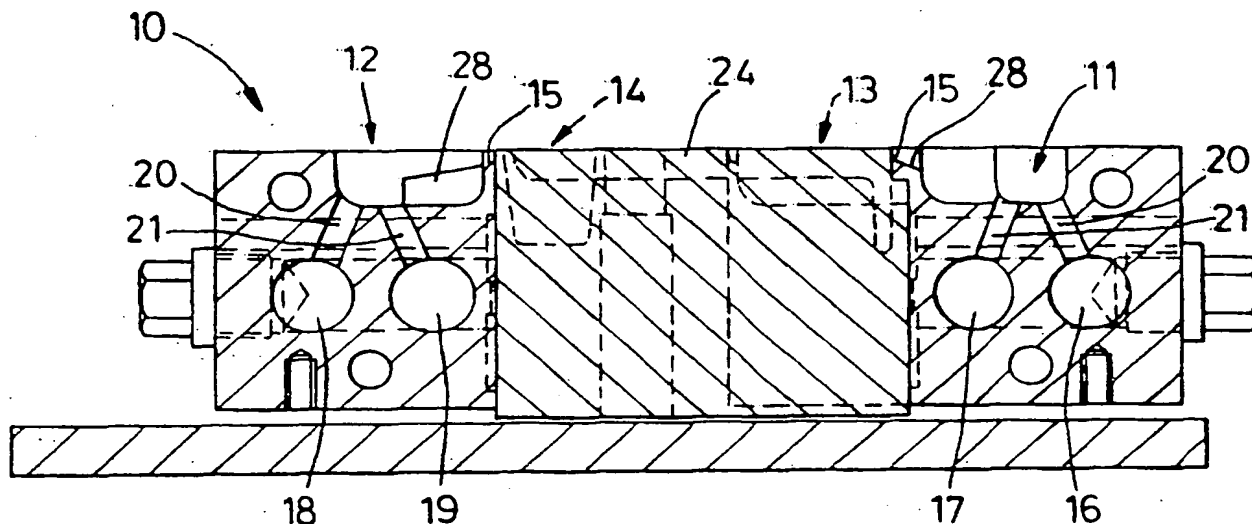

## (57) Abstract

This invention relates to apparatus for assembling battery plates and includes mould, generally indicated at (10) which defines a pair of ducts (11, 12) which supply respective sets of mould cavities (13, 14) via weirs (15). Each feed duct (11, 12) has a respective pair of feed passages (16, 17) and (18, 19) extending beneath it and is interconnected to the respective feed passages by generally vertical passages (20, 21). The feed passages (16-18) are fed by a pump.

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Apparatus for assembling Battery Plates

This invention relates to an apparatus for assembling battery plates.

The term "battery" is used herein to include accumulators. In a conventional lead-acid battery it is customary to connect together the plates of each stack by means of a lead strap or post which is fixed to aligned lugs or tabs on the plates. Apparatus for casting such straps or post onto plate lugs is described in our British Patent No. 2023471B. In this apparatus there is a mould having at least one battery strap or post mould cavity and a molten feed duct adjacent thereto, a weir between the feed duct and the cavity and a lead supply passage below the duct and connected to the duct by vertical passages through which lead can well up into the duct when lead is pumped into the passage, and the spill over the weir into the cavity. A suitable pumping arrangement is described in International Patent Application No. WO 91/05625.

It is now desired to use bigger moulds, for example a single mould for assembling the plates of two batteries disposed end to end with one another or for large configuration batteries, such as truck batteries. It will be understood that this requires twice as much lead to be delivered to the mould in a comparable time scale. The obvious solutions are either to increase the flow rate through the lead supply passage or to double the cross-sectional area of the passage. The first leads to

underfilling of the upstream end of the duct and overfilling of the downstream end of the duct as soon as the lead supply is shut off, whilst the latter results in geyser-like jets shooting up the upstream vertical passages.

5 From one aspect the invention provides apparatus for connecting a battery plate to a metal strap or post, including a mould having a set of post or strap mould cavities, a molten metal feed duct adjacent thereto, a weir between the feed duct and the cavities, means for supplying  
10 molten lead to the duct, and hence the cavities, including a pump and at least a pair of feed passages extending below the duct and connected to the duct.

The provision of at least two feed passages has surprising advantages. First they are able to supply a  
15 large quantity of lead at a relatively low velocity, thus avoiding problems arising from the lead having excess kinetic energy, such as the unequal lead levels in the duct and secondly the mass of lead in each feed passage at the beginning of an operational cycle is relatively low and so  
20 the lead can be smoothly accelerated without creating the geyser effect mentioned above.

In one preferred arrangement one feed passage is connected to the duct along or for substantially over half of the length of the duct, whilst the other feed passage is  
25 connected to the duct along or for substantially the other half of the duct. If the connection between the half of the duct, which in flow terms, is nearest the pump, is displaced further from its associated cavities than the connection for

the half of the duct which is furthest, in flow terms, from the pump, then the rate of emptying of the duct can to at least some extent be balanced.

Preferably the pump is a variable speed pump and  
5 conveniently the apparatus further comprises means for increasing the speed of the pump as metal is supplied to the duct and for subsequently reducing the speed of the pump. The pump may be a continuous rotary pump and may for example be of the type described in International Patent Application  
10 No. WO 91/05625.

The feed passages are preferably parallel and connected to the duct by generally vertical passages up which the lead can well.

In at least one embodiment there are two parallel sets  
15 of mould cavities, each having a molten feed duct and at least a pair of feed passages extending below each of the ducts and connected to their respective duct.

In that case the apparatus may further include at least one displacement body insertable into the mould to vary the  
20 volume of a duct and its associated cavities, so that it can be balanced with the volume of the other duct and cavities.

In any of the above arrangements the or each set of mould cavities may include cavities for more than one battery, in which case the cavities of the respective  
25 batteries are conveniently arranged in line, one with the other.

Although the invention has been defined above it is to be understood that it includes any inventive combination of

the features set out above or in the following description.

The invention may be performed in various ways and a specific embodiment will now be described with reference to the accompanying drawings, in which:

5       Figure 1 is a view from above of a mould for use in assembling battery plates;

          Figure 2 is an end view on arrow A;

          Figure 3 is a cross-sectional view on the line III to III in figure 1; and,

10       Figure 4 is a longitudinal section of the mould of Figure 1 taken along the line IV to IV.

          A mould is generally indicated at 10 and defines a pair of feed ducts 11,12 which supply respective sets of mould cavities 13,14 via weirs, some of which are indicated at 15.  
15       The basic construction and operation of these features is identical to that described in our British Patent No. 2023471B and the description of that Patent is incorporated into this specification for these purposes. The mould 10 is however twice the length of the mould described in our  
20       earlier Patent so that it provides mould cavities 13,14 for two batteries, the respective groups of cavities being on either side of the line B.

          Each feed duct 11,12 has a respective pair of feed passages 16,17 and 18,19 extending beneath it and to either  
25       side and is interconnected to its respective feed passages by generally vertical passages 20,21. The feed passages are in turn connected to a T-connector 22 having an inlet/outlet 23 which is connected to a lead pot and pump assembly of the

type described in International Patent Application No. WO 91/05625.

It will be noted that the feed ducts 11,12 and the feed passages 16-19 are formed in separate elements of the mould from the cavities 13,14. This is to enable the central portion 24 to be cooled on casting, whilst the wing portions 25,26 are maintained heated.

As has previously been mentioned the mould 10 operates basically in the manner described in the above mentioned Patent and Application. It is however distinguished from these, in as much as it is designed to mould twice as many posts and straps within an appropriate cycle time. This means that twice as much lead has to be delivered from the lead pot (not shown) into the feed ducts 11,12 within an acceptable time. The obvious ways of attempting to achieve that would have been to use the existing supply arrangement and simply drive the pump twice as fast or to double the cross-sectional area of the feed passage or a compromise combination of the two. Surprisingly these approaches are not appropriate, because the first introduces far too much energy into the lead within the feed passage and it is extremely difficult to control the lead, particularly when it is to be sucked back. Alternatively if the cross-sectional area is doubled then the velocity of the lead is to some extent decreased but the energy still remains relatively high. This might be overcome by further increasing the cross-sectional area of the feed passage, but in practice such an approach proves to be impractical,

because the mass of lead in the feed passage at start up is so great that either a very high local pressure is created, due to the lead's inertia, at the upstream end of the feed passage causing geysers of lead to shoot up the upstream vertical passages 20,21 or if the lead is accelerated slowly the time take to fill the mould cavities exceeds the acceptable cycle time of the apparatus.

In fact these problems can be overcome by the provision of more than one feed passage for each duct. This enables the feed passages to have a total cross-sectional area which is high enough to reduce the feed velocity, and hence the energy, to acceptable levels, but at the same time prevents the mass of lead in any particular feed passage reaching a level where it is difficult to slowly and smoothly accelerate the lead within an acceptable time. Thus despite the fact that frictional and constructional considerations would lead one away from introducing multiple feed passages, this is in fact the appropriate solution.

It will be appreciated that to achieve the desired smooth acceleration of the lead a rotary pump of the type described in International Patent Application No. WO 91/05625 is extremely desirable but any appropriate lead supply stream can be used. Depending on the dimensions and demands of the mould, it may be appropriate to use more than two feed passages for each duct and they could be fed directly and individually from the lead pot.

It is desirable that the volume created by a feed duct and its associated cavities is equal to the equivalent

volume of the other feed duct and its cavities. If it is not, then cavity volume filling will take place at different rates with the result that the filling part of the cycle will take too long. In order to allow for such a balancing operation to take place, removable displacement bodies 27 are provided. By selecting bodies of different sizes, the volume can be fine tuned.

It will also be noted that the bottom of each feed duct 11,12 as it approaches the weir 15 is formed as a ramp beach-like portion 28 to assist in the dissipation of any waves which may be set up within the feed ducts 11,12. However in at least some configurations this may lead to such a slow rise in the lead level in the duct that an even break over the weirs 15 may not be achieved. In that case the ramp 28 may be replaced by a narrow channel to provide a more rapid rise.

When the lead is allowed to drain back down out of the ducts 11,12, there may be significant time lag between when the lead starts to drain from the end of the ducts to the left of the line B in Figure 1 and when the lead starts to drain from the ends of the ducts to the right of line B. This means that the 'left' end can fall to a lower level than is necessary and hence more lead needs to be pumped back in for the next mould. Cycle time is hence increased. This can to some extent be overcome by blocking at least some of the vertical channels 21 to the left of line B and at least some of the vertical channels 20 to the right of line B. This has the effect of relatively increasing the

speed of the pump.

7. Apparatus as claimed in any one of the preceding Claims further comprising two parallel set of mould cavities, each having a molten feed duct and at least a pair  
5 of feed passages extending below each of the ducts and connected to their respective duct.

8. Apparatus as claimed in Claim 7 wherein the apparatus further includes at least one displacement body insertable into the mould to vary the volume of a duct and  
10 its associated cavities, so that it can be balanced with volume of the other duct and cavities.

9. Apparatus as claimed in any one of the preceding Claims wherein the or each set of mould cavities includes cavities for more than one battery.

15 10. Apparatus substantially as hereinbefore defined with reference to the accompanying drawings.

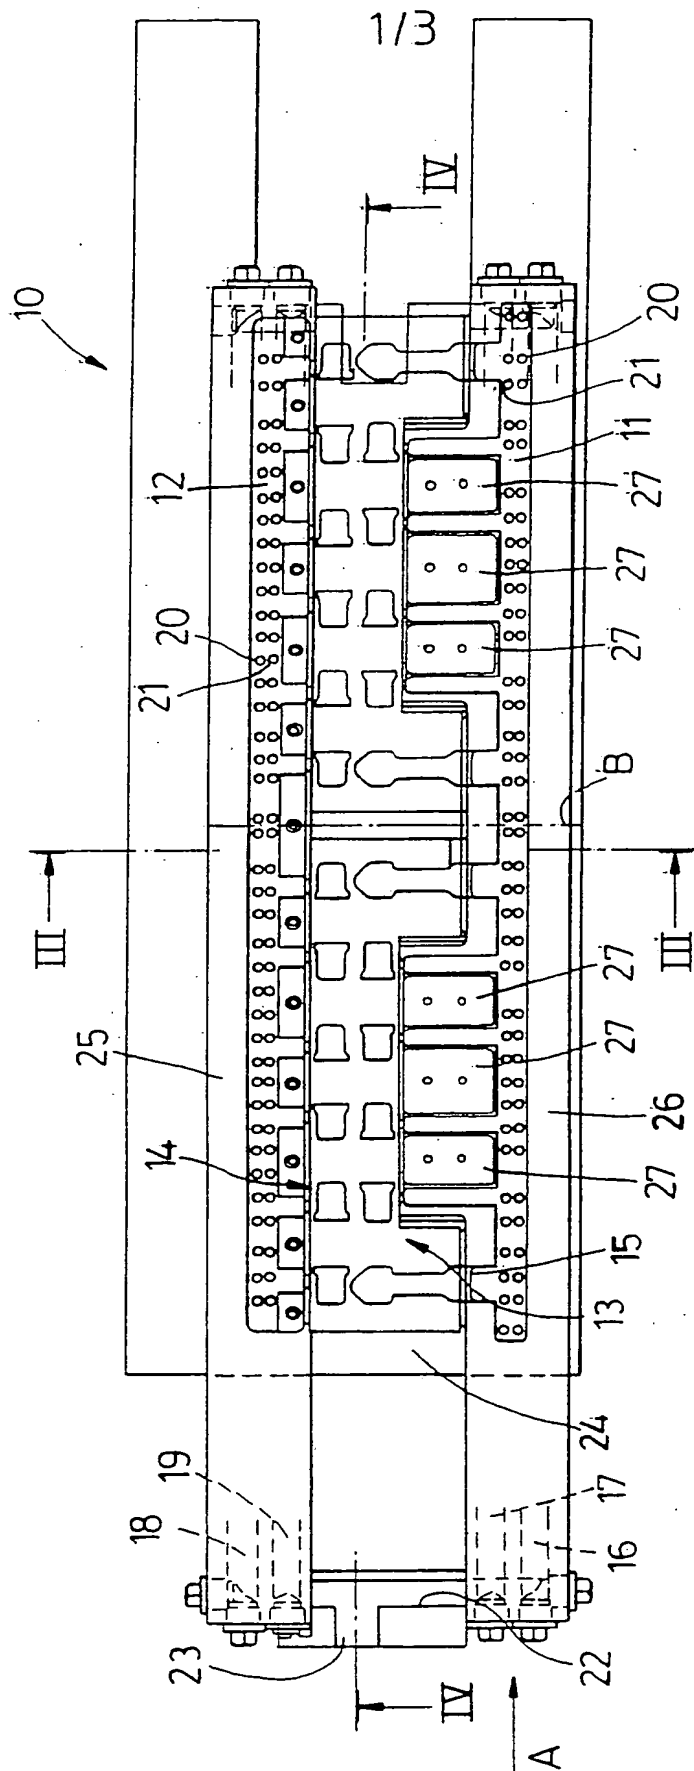


Fig. 1

2/3

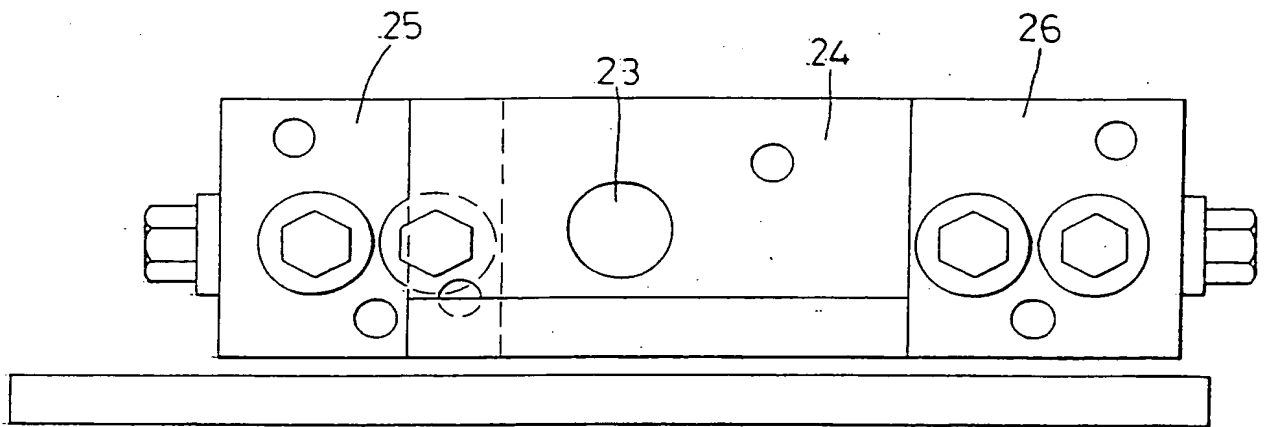


Fig. 2

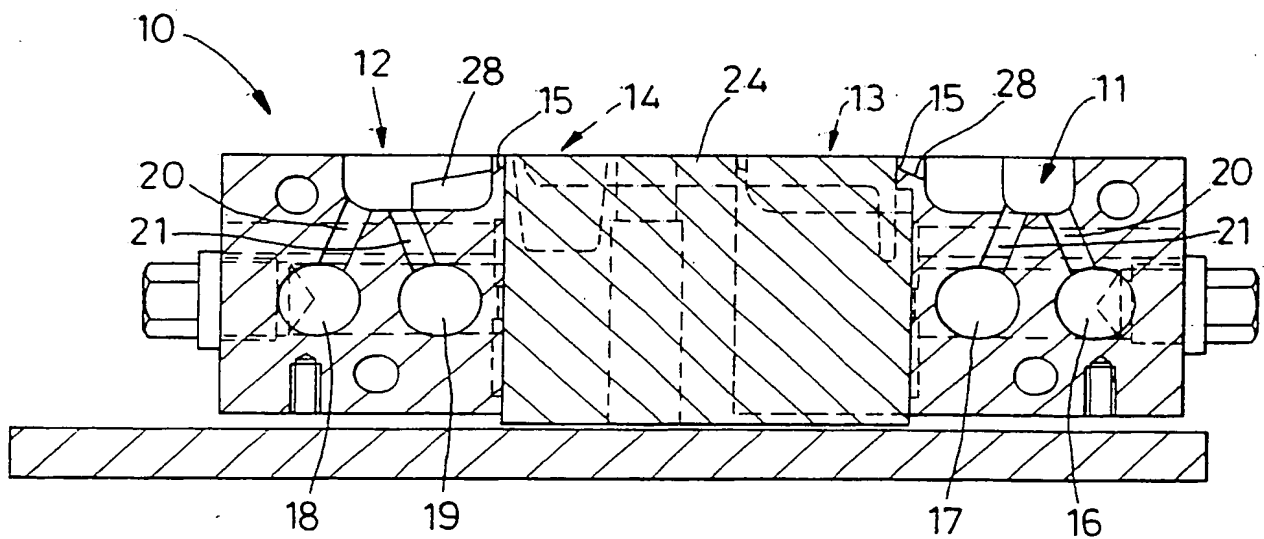


Fig. 3

3/3

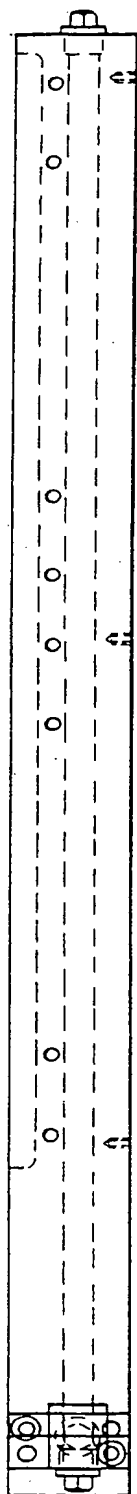


Fig. 4

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 93/02671

## A. CLASSIFICATION OF SUBJECT MATTER

H 01 M 2/28, H 01 M 10/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H 01 M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 3 565 162 (FARMER) 23 February 1971 (23.02.71), fig. 7.	1
A	DE, A, 1 421 552 (GLOBE UNION) 31 October 1968 (31.10.68), fig. 2.	1
A	GB, A, 2 023 471 (BLACKLEDGE) 03 January 1980 (03.01.80), fig. 1 (cited in the application).	1
A	WO, A1, 91/05 625 (DRG) 02 May 1991 (02.05.91), fig. 2	1

☐ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

01 April 1994

Date of mailing of the international search report

11.05.94

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patentuaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

LUX e.h.

# INTERNATIONAL SEARCH REPORT

-2-

International application No.  
PCT/GB 93/02671

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	(cited in the application). -----	

## ANHANG

zu internationalen Recherchen-  
bericht über die internationale  
Merkmalen-Nr.

## ANNEX

to the International Search  
Report to the International Patent  
Application No.

## ANNEXE

au rapport de recherche inter-  
national relatif à la demande de brevet  
international n°

PCT/GB 93/02671 SAE 83558

In diesem Anhang sind die Mitglieder  
der Patentfamilien der in obenge-  
annten internationalen Recherchenbericht  
geführten Patentdokumente angegeben.  
Diese Angaben dienen nur zur Unter-  
stützung und erfolgen ohne Gewähr.

This Annex lists the patent family  
members relating to the patent documents  
cited in the above-mentioned inter-  
national search report. The Office is  
in no way liable for these particulars  
which are given merely for the purpose  
of information.

La présente annexe indique les  
membres de la famille de brevets  
relatifs aux documents de brevets cités  
dans le rapport de recherche inter-  
national visé ci-dessus. Les renseigne-  
ments fournis sont donnés à titre indica-  
tif et n'engagent pas la responsabilité  
de l'Office.

Im Recherchenbericht geführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
3 A 1545132	23-02-71	Keine - none - rien	
5 A1 1421552		DE A 1421552 DE B 1421552	31-10-68 09-10-69
8 A1 2023471	03-01-80	AT A 4448/79 AT B 364122 DE A1 2925297 DE C2 2725297 DK A 2341/79 GB B2 2023471 US A 4269193	15-06-86 12-10-87 07-02-90 24-08-89 24-12-79 09-06-82 15-09-81
10 A1 2105625	02-05-91	AU A1 66064/90 AU B2 631940 CA A2 2067610 EP A1 495867 GB A0 8923690 JP T2 5501227 US A 5240063	16-05-91 10-12-92 21-04-91 29-07-92 06-12-89 11-03-93 31-08-93

**PThis Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☒ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**